



Präzisions-Schneideisen  
 ≈ DIN 40434 und DIN EN 22568  
**Stahlpanzerrohr-Gewinde DIN 40430**  
 Ausführung: mit Schälanschnitt

Precision thread cutting dies  
 ≈ DIN 40434 and DIN EN 22568  
 Steel conduit thread DIN 40430  
 Specification: with spiral entry

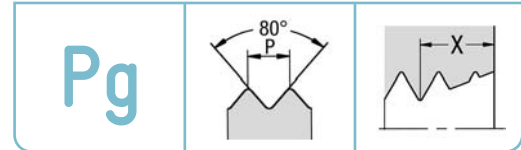

Pg

ORDER-CODE → RU →					
d ↓	Ø d mm	P Gg/1" tpi	Ø D x E mm	n	HSS
					$x = 1.75 \cdot P$ 
					Art.-Nr. €
Pg. 7	12,50	20	38 x 10	5	105556 28,40
Pg. 9	15,20	18	38 x 10	5	105557 28,40
Pg. 11	18,60	18	45 x 14	5	105548 35,50
Pg. 13,5	20,40	18	45 x 14	6	105549 35,50
Pg. 16	22,50	18	55 x 16	5	105550 47,50
Pg. 21	28,30	16	65 x 18	6	105551 67,00
Pg. 29	37,00	16	65 x 18	8	105552 67,00
Pg. 36	47,00	16	90 x 22	8	105553 146,00
Pg. 42	54,00	16	90 x 22	10	105554 168,00
Pg. 48	59,30	16	105 x 22	9	105555 186,00

→ gel, für geläppte Ausführung 20% Zuschlag

Das Gewinde für Elektroinstallationsrohre DIN EN 60423 soll das Stahlpanzerrohr-Gewinde DIN 40430 ablösen

→ gel, for lapped threads 20% extra charge

DIN 60423 electrical conduit threads supersede the DIN 40430 conduit threads

