

# GFE

Vollhartmetall-Einprofilgewindefräser für Innengewinde




Metrisches ISO-Gewinde DIN 13

Ausführung: 2 x D bzw. 3 x D

Solid carbide thread milling cutters with single ring of the teeth for internal threads

ISO metric thread DIN 13

Specification: 2 x D resp. 3 x D

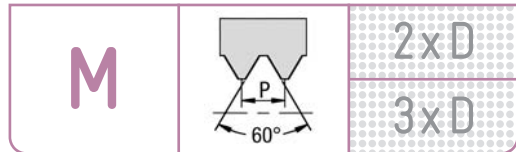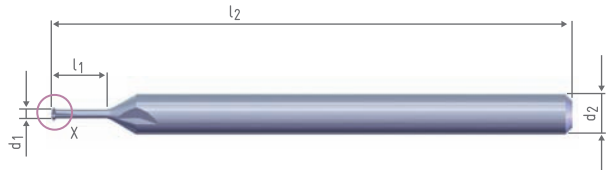

→ HA (Zyl.-Schaft nach DIN 6535, Straight shank according to DIN 6535)

ORDER-CODE → GFE								2 x D		2 x D T	
D ↓	Bereich range	P mm	l <sub>1</sub>	l <sub>2</sub>	d <sub>1</sub>	d <sub>2</sub>	z Nuten- zahl No. of flutes	blank uncoated		TiCN	
								Art.-Nr.	€	Art.-Nr.	€
M 1	M 1 - M 1,1	0,25	2,3	39		3	3	305187	○	305253	○
M 1,2		0,25	2,5	39		3	3	305233	○	305252	○
M 1,4		0,3	2,9	39		3	3	305234	○	305251	○
M 1,6	M 1,6 - M 1,7	0,35	3,5	39		3	3	305235	○	305250	○
M 1,8		0,35	3,7	39		3	3	305236	○	305249	○
M 2		0,4	4,1	39		3	4	305237	○	305248	○
M 2,2		0,45	4,5	39		3	4	305238	○	305247	○
M 2,3		0,4	4,7	39		3	4	305239	○	305246	○
M 2,5	M 2,5 - M 2,6	0,45	5,3	39		3	4	305240	○	305245	○
M 3		0,5	6,2	39		3	4	305241	○	305244	○
M 3,5		0,6	7,2	39		3	4	305242	○	305243	○

ORDER-CODE → GFE								3 x D		3 x D T	
D ↓	Bereich range	P mm	l <sub>1</sub>	l <sub>2</sub>	d <sub>1</sub>	d <sub>2</sub>	z Nuten- zahl No. of flutes	blank uncoated		TiCN	
								Art.-Nr.	€	Art.-Nr.	€
M 1	M 1 - M 1,1	0,25	3,4	39		3	3	305222	○	305215	○
M 1,2		0,25	3,7	39		3	3	305223	○	305216	○
M 1,4		0,3	4,3	39		3	3	305224	○	305127	○
M 1,6	M 1,6 - M 1,7	0,35	5,2	39		3	3	305225	○	305128	○
M 1,8		0,35	5,5	39		3	3	305226	○	305217	○
M 2		0,4	6,1	39		3	4	305227	○	305129	○
M 2,2		0,45	6,7	39		3	4	305228	○	305218	○
M 2,3		0,4	7,0	39		3	4	305229	○	305219	○
M 2,5	M 2,5 - M 2,6	0,45	7,9	39		3	4	305230	○	305220	○
M 3		0,5	9,2	39		3	4	305231	○	305130	○
M 3,5		0,6	10,7	39		3	4	305232	○	305221	○

○ am Lager, Preis auf Anfrage

○ in stock, price on request