



Maakt verspanen **bewezen** efficiënter!

New metric tapped balls allow use with Extension Tubes (page 17) and Spray Tips (page 16).

BugEye™



SCREW-LOCK BALL EXTENDED COOLANT NOZZLE FOR CNC LATHES

- Extended ball socket provides greater range of aimability than the **BlackEye** (page 25) while still being relatively compact
- Ideal for tool positions where tool tip is difficult to reach with standard screw-lock ball (i.e. short tool projections)
- Rated to 150 PSI maximum
- Sizes available to fit almost every machine or toolholder
- Choose the orifice diameter to suit your application

DIMENSIONS IN INCHES (except as noted)

Part No.	Nominal Dia. "D"	Orifice Dia. "d"	L	Pkg Qty
BUG02305	12 mm	.11	1.10	5
BUG02310	12 mm	.16	1.10	5
BUG02312	12 mm	M6 x 1.0	1.10	5
BUG02315	14 mm	.11	1.20	5
BUG02320	14 mm	.16	1.20	5
BUG02322	14 mm	M6 x 1.0	1.20	5
BUG02325	15 mm	.11	1.23	5
BUG02330	15 mm	.16	1.23	5
BUG02332	15 mm	M6 x 1.0	1.23	5
BUG02335	22 mm	.11	1.50	5
BUG02340	22 mm	.16	1.50	5
BUG02342	22 mm	M6 x 1.0	1.50	5
BUG02345	1/2 inch	.11	1.12	5
BUG02350	1/2 inch	.16	1.12	5
BUG02352	1/2 inch	M6 x 1.0	1.12	5
BUG02355	5/8 inch	.11	1.23	5
BUG02360	5/8 inch	.16	1.23	5
BUG02362	5/8 inch	M6 x 1.0	1.23	5

Material:

Body: Acetal


Ball: Stainless Steel

Maximum Pressure:

150 PSI (10 bar)

Maximum Operating

Temperature: 160° F (70° C)

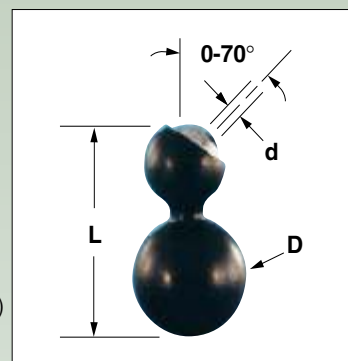

BugEye shown installed on CNC turning center.

Ordering Information: Measure the diameter of the original ball in your machine and order the nominal diameter to suit.